



Automation for a Changing World

## **Delta Temperature Controller DT Series**



[www.delta.com.tw/ia](http://www.delta.com.tw/ia)

 **DELTA**  
Smarter. Greener. Together.

# Features

## Many Sizes Available:

- From 48x24mm to 96x96mm, all panel sizes comply with international standards.


## Quality Assurance:

- All temperature controllers adopt an isolated switching power supply.
- 100 ~ 240VAC input power supply, applicable in all countries of the world.
- CE, UL and C-Tick certified




## Supports Various Sensors:

- Built-in various sensor input modes: Thermocouple, platinum RTD or linear voltage/current.

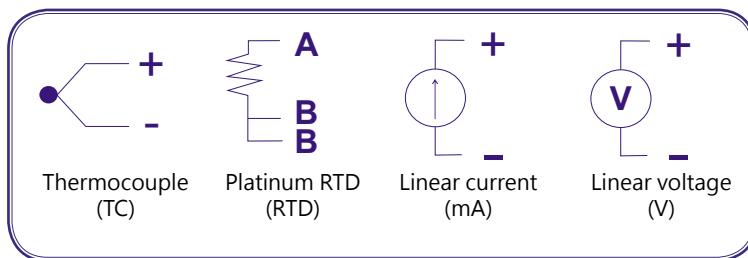


## Various Output Modes:

- Relay, voltage pulse, linear voltage, and linear current

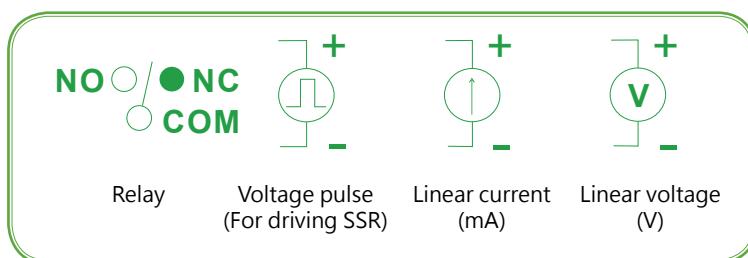

## Stable Control:

- Built-in PID control function, with accurate auto-tuning (AT).
- PID parameters are automatically calculated, which enhances the stability of the system and accuracy of control.

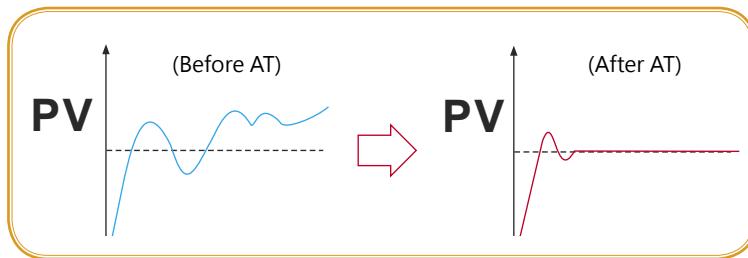


## Current Transformer (CT):

- CT can enable the off-line alarm and can detect if the current is overloaded.




## Programmable Control:

- Max. 8 patterns available, with 8 steps in each pattern.  
No master controller is required for planning many kinds of temperature control curves.

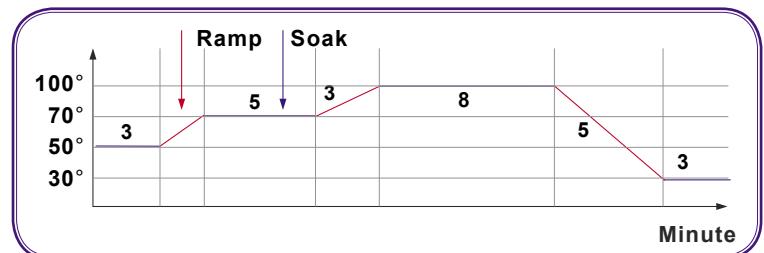

## Communication:

- RS-485 communication interface, supporting Modbus ASCII/RTU communication

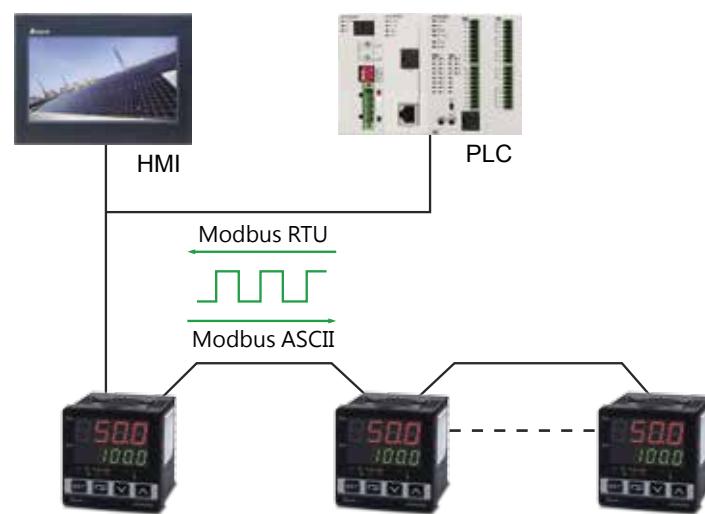


## Safety:

- The key-locking function and communication protection prevents malfunction.




## Dual Output Control:

- Able to execute heating and cooling controls at the same time, allowing the system to reach the set temperature quickly.

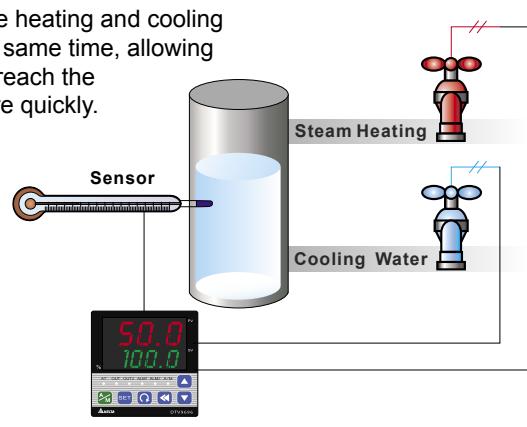

## Products

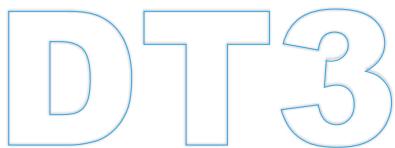


## Next Generation Temperature Controller

The Delta temperature controller DT3 series is designed with upgraded hardware and higher specifications as well as smart operation, fast response, easy modularization, plus user-friendly and user-defined function keys. With Self-Tuning and FUZZY temperature control functions, controllers can be installed in open space and confined space applications and are capable of presenting a smooth temperature control curve. In addition, the innovative design enables customers to replace the module with new functions to attain the ultimate in extension flexibility.




### ■ Remote Control

Sets DT3 temperature via analog output of host controller

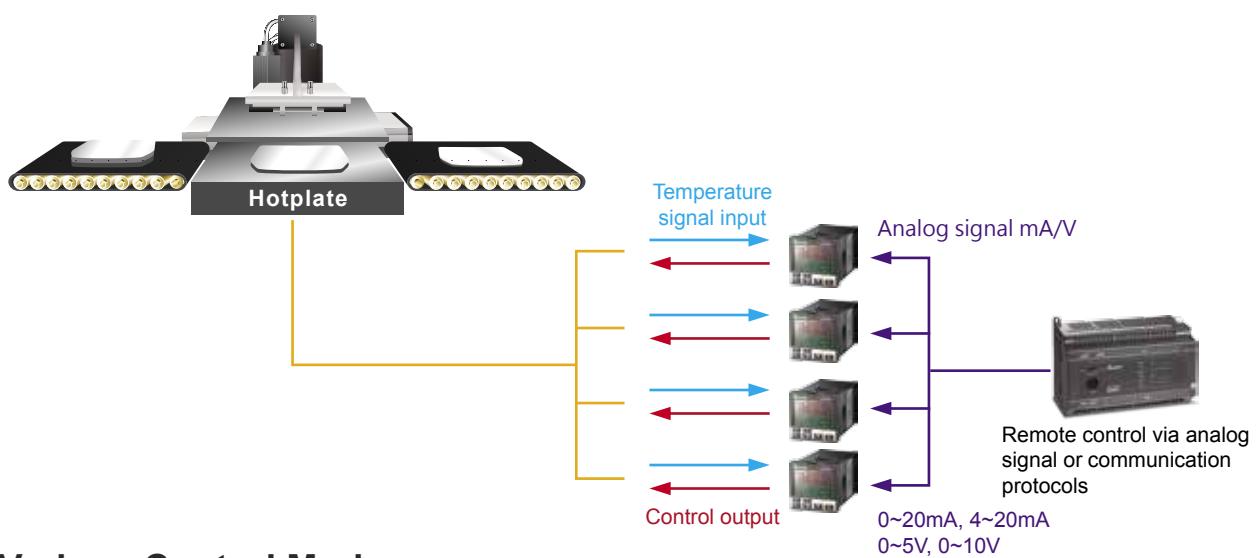


### ■ Various Control Modes

- ▶ Self Tuning
- ▶ FUZZY
- ▶ Auto - tuning
- ▶ ON/OFF
- ▶ Manual

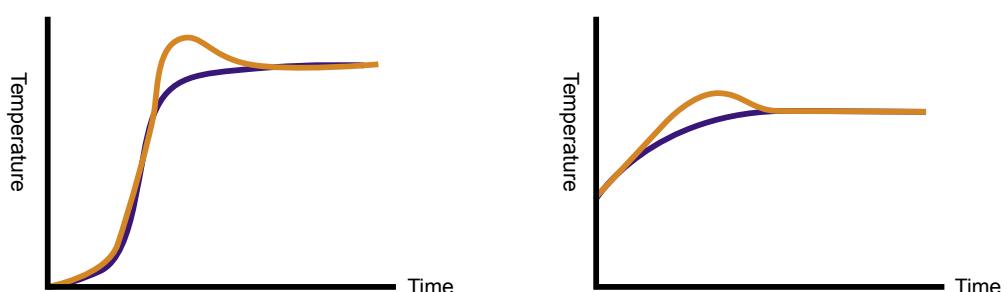

## ■ Extension Ability

Modular design of functional devices lets users replace the module as needed for application flexibility

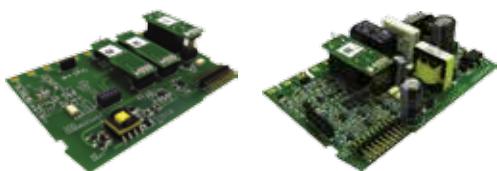


## ■ Large 3-color LCD Display

The 1st 3-color LCD temperature controller in Taiwan.




## ■ Heater Disconnection Detection

Measurable up to 100A

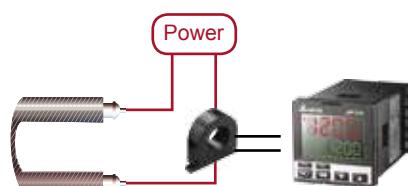

## ■ Retransmission Output

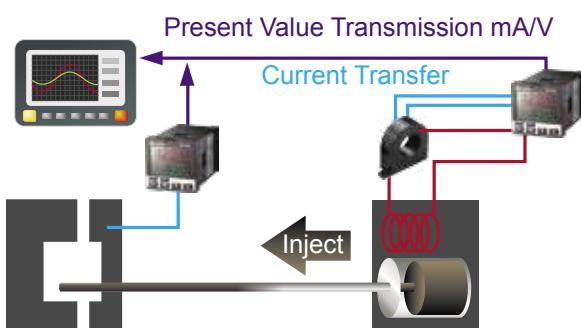

## ■ User-defined Function Keys

- ▶ Menu
- ▶ Auto - tuning
- ▶ Control modes selection
- ▶ RUN/STOP Mode
- ▶ Program hold




## ■ Point-to-Point Control (Proportional Output mA/V)

Sets the Present Value by point-to-point control.



## ■ Dual Output Control

- ▶ Preset temperature is rapidly attained using two sets of outputs for heating and cooling control.
- ▶ This function is used to automatically calculate two sets of PID parameters, one for heating and one for cooling.

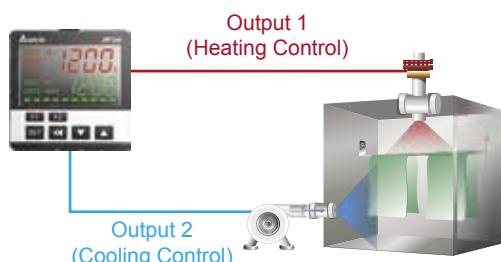



## Specifications

Input power supply	AC 80 to 260 V, 50/60Hz, DC 24 V ±10%
Display method	LCD. Present temperature: red, Set temperature: green
Input sensors	Thermocouple: K, J, T, E, N, R, S, B, L, U, TXK
	Platinum RTD: Pt100, JPt100
	Analog input: 0 to 5 V, 0 to 10 V, 0 to 20 mA, 4 to 20 mA, 0 to 50 mV
Control modes	PID, PID programmable, Fuzzy, Self-tuning, manual, ON/OFF
Display accuracy	0 or 1 digit to the right of the decimal point
Sampling rate	Analog input: 0.1s, Thermocouple or platinum RTD: 0.1s
Ambient temperature	0 ~ +50°C
Ambient humidity	35 to 80% RH (non-condensing)

## Alarm Outputs

The DT3 offers 3 alarm outputs, and each alarm output has 12 alarm modes to choose from in the initial setting mode. When the target temperature exceeds or falls below the set point, the alarm output is enabled.

SV	Alarm mode	Alarm output operation
0	No alarm	
1	Alarm output will be enabled when the temperature reaches upper or lower limit: The alarm will be enabled when the PV exceeds SV + AL-H or falls below SV - AL-L.	ON [ ] OFF [ ] ▲ SV-(AL-L) ▲ SV ▲ SV-(AL-H)
2	Alarm output will be enabled when the temperature reaches the upper limit: The alarm will be enabled when the PV exceeds SV + AL-H.	ON [ ] OFF [ ] ▲ SV ▲ SV-(AL-H)
3	Alarm output will be enabled when the temperature reaches the lower limit: The alarm will be enabled when the PV falls below SV - AL-L.	ON [ ] OFF [ ] ▲ SV-(AL-L) ▲ SV
4	Alarm output will be enabled when the temperature reaches the absolute value of the upper or lower limit: The alarm will be enabled when the PV exceeds AL-H or falls below AL-L.	ON [ ] OFF [ ] ▲ AL-L ▲ AL-H
5	Alarm output will be enabled when the temperature reaches the absolute value of the upper limit: The alarm will be enabled when the PV exceeds AL-H.	ON [ ] OFF [ ] ▲ AL-H
6	Alarm output will be enabled when the temperature reaches the absolute value of the lower limit: The alarm will be enabled when the PV falls below AL-L.	ON [ ] OFF [ ] ▲ AL-L
7	Upper limit hysteresis alarm: The alarm will be enabled when the PV exceeds SV + AL-H. The alarm will be disabled when the PV falls below SV + AL-L.	ON [ ] OFF [ ] ▲ AL-L ▲ AL-H
8	Lower limit hysteresis alarm: The alarm will be enabled when the PV below SV - AL-H. The alarm will be disabled when the PV exceeds SV - AL-L.	ON [ ] OFF [ ] ▲ AL-L ▲ AL-H
9	Offline alarm: The alarm will be enabled when the input sensor is not correct or offline.	
10	Timing alarm	
11	Ct1 alarm: The alarm will be enabled when the CT1 value falls below AL-L or exceeds AL-H.	ON [ ] OFF [ ] ▲ AL-L ▲ AL-H
12	Ct2 alarm: The alarm will be enabled when the CT2 value falls below AL-L or exceeds AL-H.	ON [ ] OFF [ ] ▲ AL-L ▲ AL-H



## RS-485 Communication

DT3 supports baudrate 2,400 to 38,400 bps, MODBUS ASCII/RTU protocol, function code 03H and reads maximum 8 words from the register.

Address	Content	Definition
1000H	Present value (PV)	Measuring unit: 0.1 scale. The following values read mean error occurs. 8002H: Temperature not yet acquired 8003H: Not connected to sensor 8004H: Incorrect sensor
1001H	Set value (SV)	Measuring unit: 0.1 scale.
1002H	Upper limit of temp. range	Cannot exceed the default value
1003H	Lower limit of temp. range	Cannot fall below the default value
1005H	Control mode	0: PID, 1: ON/OFF, 2: Manual, 3: PID programmable
1006H	Heating/cooling control	0: Heating, 1: Cooling, 2: Heating/cooling, 3: Cooling/heating
1007H	1 <sup>st</sup> heating/cooling control cycle	0 ~ 99 sec. 0: 0.5 sec.
1008H	2 <sup>nd</sup> heating/cooling control cycle	0 ~ 99 sec. 0: 0.5 sec.
1009H	Proportional band (PB)	0.1 ~ 999.9
100AH	Ti value	0 ~ 9999
100BH	Td value	0 ~ 9999
1012H	Read/write Output 1 volume	Unit: 0.1%, only valid in manual control mode
1013H	Read/write Output 2 volume	Unit: 0.1%, only valid in manual control mode
1016H	Regulated temp. value	-99.9 ~ +99.9, Unit: 0.1
102AH	Read/write LED status	b0 : ALM3 · b1 : ALM2 · b2 : F · b3 : C · b4 : ALM1 · b5 : OUT2 · b6 : OUT1 · b7 : AT
102BH	Read/write key status	b0: Set, b1: Select, b2: Up, b3: Down, 0: Press it
102CH	Panel lockup status	0: Normal, 1: Fully locked, 11: SV adjustable
102DH	CT value	Unit: 0.1A
1815H	Programmable control Run or Stop	0: Run (default), 1: Stop
1816H	Programmable control Run or Pause	0: Run (default), 1: Pause

# Parameters Operation



Regulation Mode	Operation Mode	Initial Setting Mode
<b>Rt</b> Auto-tuning (Set in PID control and RUN mode) Press <b>◀ ▶</b>	<b>I234</b> Use <b>▲ ▼</b> to set up target temperature Press <b>◀ ▶</b>	<b>CNP</b> Set up input type Press <b>◀ ▶</b>
<b>St</b> Self-tuning switch (set when in PID control and the TUNE parameter = ST)	<b>R-S</b> Control loop RUN or STOP	<b>EPUN</b> Set up temperature unit (not displayed when in analog input)
<b>Pdn</b> Select the nth (n = 0 ~ 5) PID. When n = 6, PID is auto-selected.	<b>PERN</b> Set up start pattern (when in PID programmable control and <b>PSTEP</b> )	<b>EP-H</b> Set up upper temperature limit
<b>PdoF</b> Set up PID control offset	<b>SEEP</b> Set up start step (when in programmable control)	<b>EP-L</b> Set up upper temperature limit
<b>Fz-R</b> Set up Fuzzy gain value	<b>SP</b> Set up the position of decimal point	<b>TR-RI</b> Select control modes
<b>Fzdb</b> Set up Fuzzy Deadband	<b>LOCK</b> Lock the keys	<b>ERS</b> Select SV control modes
<b>o1-S</b> Adjust Output 1 hysteresis (when in ON/OFF control)	<b>RLIH</b> Set up upper limit of Alarm 1	<b>WEU</b> Set up waiting temperature (when in programmable control)
<b>o2-S</b> Adjust Output 2 hysteresis (when in ON/OFF control)	<b>RLL1</b> Set up lower limit of Alarm 1	<b>WT-T</b> Set up waiting time (when in programmable control)
<b>o1-H o1-L</b> Control cycle for Output 1 (except in ON/OFF control)	<b>RL2H</b> Set up upper limit of Alarm 2	<b>SLOP</b> Set up start slope (when in programmable control)
<b>o2-H o2-L</b> Control cycle for Output 2 (except in ON/OFF control)	<b>RL2L</b> Set up lower limit of Alarm 3	<b>PREN</b> Select pattern to be edited
<b>CoEF</b> Ratio of Output 1 against Output 2 when in dual output control (set when in PID and dual output control)	<b>RL3H</b> Set up upper limit of Alarm 2	<b>TUNE</b> Select AT or ST
<b>dERd</b> Set up deadband (when in dual output)	<b>RL3L</b> Set up lower limit of Alarm 3	<b>S-HC</b> Select heating, cooling or dual output heating and cooling
<b>PV-F</b> Set up input filter factor	<b>RIHP</b> Record highest temperature of Alarm 1	<b>RL1</b> <b>RL2</b> <b>RL3</b> Set up Alarm 1 mode
<b>PVor</b> Set up input filter range	<b>RLP</b> Record lowest temperature of Alarm 1	<b>RL1o</b> <b>RL2o</b> <b>RL3o</b> Set up Alarm 1 options
<b>PVof</b> Adjust input compensation	<b>R2HP</b> Record highest temperature of Alarm 2	<b>RL1d</b> <b>RL2d</b> <b>RL3d</b> Set up Alarm 1 delay
<b>PVER</b> Adjust input gain	<b>R2LP</b> Record lowest temperature of Alarm 2	<b>oELN</b> Set up reverse alarm output
<b>SVSL</b> Set up rising slope (when CRTS = SLOP)	<b>R3HP</b> Record highest temperature of Alarm 3	<b>RMEP</b> Set up Remote type
<b>RIMR</b> Adjust upper limit compensation for analog Output 1*	<b>R3LP</b> Record lowest temperature of Alarm 3	<b>EXEC</b> Select auxiliary function

Regulation Mode	Operation Mode	Initial Setting Mode
RIM1  Adjust lower limit compensation for analog Output 1*	OUT1  Display and adjust Output 1 volume	COSH  Enable/disable communication write-in
R2M1  Adjust upper limit compensation for analog Output 2*	OUT2  Display and adjust Output 2 volume	C-SL  Select ASCII or RTU format
R2M2  Adjust lower limit compensation for analog Output 2*	oIMR  Set up upper limit percentage for Output 1	C-No  Set up communication address
REMR  Adjust upper limit compensation for Retransmission*	oIML  Set up lower limit percentage for Output 1	bPS  Set up baudrate
REL1  Adjust lower limit compensation for Retransmission*	o2MR  Set up upper limit percentage for Output 2	LEN  Set up data length
RM-6  Adjust Remote gain	o2ML  Set up lower limit percentage for Output 2	Stop  Set up stop bit
RM-F  Adjust Remote compensation	L1  Display current measured at CT1	PRBY  Set up parity bit
EV1  Set up EVENT1 function	CT2  Display current measured at CT2  Press <b>◀</b> to return to set up target temperature	Press <b>◀</b> to return to set up input type
EV2  Set up EVENT2 function		
EV3  Set up EVENT3 function Press <b>◀</b> to return to auto-tuning		

\*1 scale = 1μA; 1scale = 1mV

PID mode: Any of the 6 PID groups can be selected. When n = 6, the program will automatically select the PID group that is the closest to the target temperature.

<b>PIDn</b> Select the nth PID (n = 0 ~ 5)  Press <b>◀ ▶</b> > 0 ~ 5 <sup>th</sup> PID	<b>Sv0</b> Set up the 0th PID temperature value Press <b>◀ ▽</b>	<b>Sv5</b> Set up the 5 <sup>th</sup> PID temperature value Press <b>◀ ▽</b>
	<b>P0</b> Set up the 0th proportional band value	<b>P5</b> Set up the 5 <sup>th</sup> proportional band value
	<b>i0</b> Set up the 0th Ti value	<b>i5</b> Set up the 5 <sup>th</sup> Ti value
	<b>d0</b> Set up the 0th Td value	<b>d5</b> Set up the 5 <sup>th</sup> Td value
	<b>IoF0</b> Set up the 0th PID integral deviation Press <b>◀</b> to return to PID deviation	<b>IoF5</b> Set up the 5 <sup>th</sup> PID integral deviation Press <b>◀</b> to return to PID deviation

Patterns and steps: Edit **PROS** in **CTRL** parameter. Take editing pattern 0 for example:

<b>PERN</b> Select the pattern number to be edited Select number ▶ Press <b>◀ ▽</b> to select OFF  Exit pattern and step editing and switch to <b>S-HC</b> to continue the setup process	<b>SP00</b> Edit temperature for Step 0 Press <b>◀ ▽</b>	<b>PSY0</b> Select actual number of steps when the program is executing Press <b>◀ ▽</b>
	<b>EM00</b> Edit time for Step 0 (time unit: hr, min)	<b>CY00</b> Set up additional cycles (0 ~ 99) for the pattern execution
	Set up Step 0 ~ 15 in order	<b>LEND</b> Set up link pattern. OFF refers to the program end. Press <b>◀</b> to return to select the pattern number to be edited
	<b>SP15</b> Edit temperature for Step 15 <b>EM15</b> Edit time for Step 15 Press <b>◀</b> to set up actual step numbers	

## Products

# DTA Standard Type

DTA is designed for practical applications, offering the 3 most frequently adopted output types in the market. DTA has many user-friendly functions built-in and a handy transmission structure, ensuring fast and stable data transmission.

Optional functions: RS-485 communication interface (MODBUS ASCII/RTU, 2,400 ~ 38,400bps), CT (current transformer)



## Electrical Specifications

Power supply	100 ~ 240VAC, 50/60Hz
Voltage range	85 ~ 110% rated voltage
Power consumption	5VA Max.
Display	2-line 7-segment LED display, PV: red; SV: green
Input temperature sensors	Thermocouple: K, J, T, E, N, R, S, B, U, L, TXK Platinum RTD: Pt100, JPt100
Display scale	0.1% full scale
Control methods	PID, ON/OFF, Manual
Output types	Relay: 250VAC, 5A, SPDT (DTA4848: SPST)
	Voltage pulse: 14VDC, Max. output current: 40mA
	Current: DC 4 ~ 20mA (Load resistance: < 600W)
Sampling rate	0.5 second
Communication	RS-485 digital communication, 2,400 ~ 38,400bps (optional)
Communication protocol	MODBUS protocol, ASCII/RTU format (optional)
Vibration resistance	10 ~ 55Hz, 10m/s <sup>2</sup> for 10 mins in X, Y, Z direction
Shock resistance	Max. 300m/s <sup>2</sup> , 3 times in each of 3 axes, 6 directions
Ambient temperature	0°C ~ 50°C
Storage temperature	- 20°C ~ + 65°C
Altitude	< 2,000m
Ambient humidity	35 ~ 85% RH (non-condensing)
Waterproof degree	IP56

# DTB Advanced Type

Compared to the DTA, DTB has an added linear voltage output and adopts dual-loop output control, able to execute heating and cooling controls at the same time in a temperature control system.

DTB series has a built-in RS-485 communication interface (MODBUS ASCII/RTU, 2,400 ~ 38,400bps). The programmable PID control function allows the DTB to set up 64 sets of temperature and control times.

Optional functions:

- CT (current transformer), output by alarm.
- EVENT function, switching between 2 SVs by using PLC or switches.
- Valve models are able to adjust the openness of valves depending on the SV.



## Electrical Specifications

Power supply	100 ~ 240VAC, 50/60Hz
Voltage range	85 ~ 110% rated voltage
Power consumption	< 5VA
Display	2-line 7-segment LED display, 4 digits available, PV: red, SV: green
Input temperature sensors	Thermocouple: K, J, T, E, N, R, S, B, L, U, TXK
	Platinum RTD: Pt100, JPt100
	Analog input: 0 ~ 5V, 0 ~ 10V, 0 ~ 20mA, 4 ~ 20mA, 0 ~ 50mV
Display scale	1 digit after decimal point, or no decimal point
Control methods	PID, programmable PID, ON/OFF, Manual
Output types	Relay: SPDT (DTB4848/4824: SPST), Max. load: 250VAC, Resistive load: 5A
	Voltage pulse: 14VDC, Max. output current: 40mA
	Current: DC 4 ~ 20mA (Load resistance: < 600WΩ)
	Analog voltage: 0 ~ 10V
Sampling rate	Analog input: 0.15 second, Thermocouple or platinum RTD: 0.4 second
Communication	RS-485 digital communication, 2,400 ~ 38,400bps
Communication protocol	MODBUS protocol, ASCII/RTU format
Vibration resistance	10 ~ 55Hz, 10m/s <sup>2</sup> for 10 mins in X, Y, Z direction
Shock resistance	Max. 300m/s <sup>2</sup> , 3 times in each of 3 axes, 6 directions
Ambient temperature	0°C ~ 50°C
Storage temperature	- 20°C ~ + 65°C
Altitude	< 2,000m
Ambient humidity	35 ~ 85% RH (non-condensing)
Waterproof degree	IP56

## Products

# DTC Modular Type

DTC features a modular and wire-saving structure, and is able to monitor many temperature points by parallel and modular extension. The user is able to set up the suitable output method according to actual demand. The built-in password protection prevents unauthorized operation or malicious damage from staff.

DTC series has a built-in RS-485 communication interface (MODBUS ASCII/RTU, 2,400 ~ 38,400bps). The programmable PID control function allows the DTC to set up 64 sets of temperature and control times. DTC also supports 3 levels of password protection, synchronous communication protocol and auto ID setup.



## Electrical Specifications

Power supply	24VDC, isolated switching power supply
Voltage range	90 ~ 110% rated voltage
Power consumption	3W + 3W x number of DTC2000 controllers connected in parallel (Max. 7)
Input temperature sensors	Thermocouple: K, J, T, E, N, R, S, B, L, U, TXK
	Platinum RTD: Pt100, JPt100
	Linear current: 0 ~ 5V, 0 ~ 10V, 0 ~ 20mA, 4 ~ 20mA, 0 ~ 50mV
Control methods	PID, programmable PID, ON/OFF, Manual
Output types	Relay: SPST, Max. load: 250VAC, Resistive load: 3A
	Voltage pulse: 12VDC, Max. output current: 40mA
	Current: DC 4 ~ 20mA (Load resistance: < 500WΩ)
	Analog voltage: 0 ~ 10V (Load resistance: > 1,000WΩ)
Sampling rate	Analog input: 0.15 second, Thermocouple or platinum RTD: 0.4 second
Communication	RS-485 digital communication, 2,400 ~ 38,400bps
Communication protocol	MODBUS protocol, ASCII/RTU format
Vibration resistance	10 ~ 55Hz, 10m/s <sup>2</sup> for 10 mins in X, Y, Z direction
Shock resistance	Max. 300m/s <sup>2</sup> , 3 times in each of 3 axes, 6 directions
Ambient temperature	0°C ~ 50°C
Storage temperature	- 20°C ~ + 65°C
Altitude	< 2,000m
Ambient humidity	35 ~ 85% RH (non-condensing)

# DTD

## Economical Type

DTD series offers PID, programmable PID, ON/OFF and Manual control modes and supports 1 alarm output with 8 alarm modes, which reduces cost but enhances functions.

The programmable PID control function allows the DTD to set up 8 sets of temperature and control times.



## Electrical Specifications

Power supply	100 ~ 240VAC, 50/60Hz	
Voltage range	85 ~ 110% rated voltage	
Power consumption	6VA Max.	
Display	7-segment LED display, PV: red, SV: green	
Input temperature sensors	Thermocouple: K, J, T, E, N, R, S, B, L, U, TXK	
	Platinum RTD: Pt100, JPt100	Copper resistance: Cu50
	Current: 0 ~ 20mA, 4 ~ 20mA	Voltage: 0 ~ 5V, 0 ~ 10V, 0 ~ 70mV
Display scale	K2, J2, T2, Pt100-2, JPt100, Cu50: 0.1°, Others: 1°	
Control methods	PID, programmable PID, ON/OFF, Manual	
Output types	Relay: 250VAC, 5A, SPST	
	Voltage pulse: 14VDC, Max. output current: 40mA	
Sampling rate	0.4 second (analog input and sensor input)	
Vibration resistance	10 ~ 55Hz, 10m/s <sup>2</sup> for 10 mins in X, Y, Z direction	
Shock resistance	Max. 300m/s <sup>2</sup> , 3 times in each of 3 axes, 6 directions	
Ambient temperature	0°C ~ 50°C	
Storage temperature	- 20°C ~ + 65°C	
Altitude	< 2,000m	
Ambient humidity	35 ~ 85% RH (non-condensing)	
Waterproof degree	IP56	

## Products

# DTE Multi-Channel Modular Type

DTE series is a multi-channel modular type temperature controller. The DTE10T supports 8 thermocouple inputs and the DTE10P supports 6 platinum RTD inputs. The DTE series is installed on DIN rail, and each channel operates independently. DTE series offers many optional output modules (relay, voltage pulse, current and linear current). The built-in RS-485 2-wire communication allows transmission of up to 115,200bps.

The programmable PID control function allows the DTE to set up 64 sets of temperature and control times. Maximum 7 DTC2000 controllers are extendable to DTE, and DTE supports the same synchronous communication protocol and auto ID setup which DTC supports.



## Electrical Specifications

Power supply	24VDC, isolated switching power supply
Voltage range	90 ~ 110% rated voltage
Power consumption	Max. 10W + 3W + 3W x number of DTC2000 controllers connected in parallel (Max. 7)
Input temperature sensors	Thermocouple: K, J, T, E, N, R, S, B, L, U, TXK Platinum RTD: Pt100, JPt100      Copper resistance: Cu50
Control methods	PID, programmable PID, ON/OFF, Manual
Output types	Relay: SPST, Max. load: 250VAC, Resistive load: 3A
	Voltage pulse: 24VDC, Max. output current: 40mA
	Current: DC 4~20mA (Load resistance: < 500WΩ)
	Analog voltage: 0 ~ 10V (Load resistance: > 1,000Ω)
Sampling rate	Thermocouple or platinum RTD: 1.0 second/all inputs
Communication	RS-485 digital communication, 2,400 ~ 115,200bps
Communication protocol	MODBUS protocol, ASCII/RTU format
Vibration resistance	10 ~ 55Hz, 10m/s <sup>2</sup> for 10 mins in X, Y, Z direction
Shock resistance	Max. 300m/s <sup>2</sup> , 3 times in each of 3 axes, 6 directions
Ambient temperature	0°C ~ 50°C
Storage temperature	- 20°C ~ + 65°C
Altitude	< 2,000m
Ambient humidity	35 ~ 85% RH (non-condensing)

# DTV Valve Type

DTV series is designed for electronic valve applications. It is user-friendly and easy to use. DTV has built-in MODBUS communication, which allows handier data collection.

DTV also features:

- Auto/manual mode switching by a single key.
- "Left" key makes the parameter setting faster.
- Real-time output percentage display, for the user to check the openness of the valve.
- 2 alarm outputs, 17 alarm modes.
- RS-485 communication interface for DTV to monitor and collect data from other temperature controllers on the network.



## Electrical Specifications

Power supply	100 ~ 240VAC, 50/60Hz
Voltage range	85 ~ 110% rated voltage
Power consumption	< 5VA
Display	2-line 7-segment LED display, 4-bit or 2-bit valve openness display available
	PV: red, SV & openness of valve: green
Input temperature sensors	Thermocouple: K, J, T, E, N, R, S, B, L, U, TXK
	Platinum RTD: Pt100, JPt100
	Analog input: 0 ~ 5V, 0 ~ 10V, 0 ~ 20mA, 4 ~ 20mA, 0 ~ 50mA
Display scale	1 digit after decimal point, or no decimal point
Control methods	PID, programmable PID, ON/OFF, Manual
Output types	Relay: SPST
	Max. load: 250VAC, Resistive load: 5A
Sampling rate	Analog input: 0.15 second, Thermocouple or platinum RTD: 0.4 second
Communication	RS-485 digital communication, 2,400 ~ 38,400bps
Communication protocol	MODBUS protocol, ASCII/RTU format
Vibration resistance	10 ~ 55Hz, 10m/s <sup>2</sup> for 10 mins in X, Y, Z direction
Shock resistance	Max. 300m/s <sup>2</sup> , 3 times in each of 3 axes, 6 directions
Ambient temperature	0°C ~ 50°C
Storage temperature	- 20°C ~ + 65°C
Altitude	< 2,000m
Ambient humidity	35 ~ 85% RH (non-condensing)
Waterproof degree	IP56

## Ordering Information

### DT3

**1 2 3 4 5 6 7 8**

Series Name	DT3 : Delta DT3 Series Temperature Controller	
<b>1 2</b> Panel size (W x H)	20 : 4848 : 1/16 DIN W48 x H48 mm 30 : 7272 : W72 x H72mm	40 : 4896 : 1/8 DIN W48 x H96 mm 60 : 9696 : 1/4 DIN W96 x H96 mm
<b>3</b> Output 1 options	R: Relay, 250 VAC, 5A V: Voltage pulse, 12V +10 to 20% C: DC current, 4 to 20mA L: Linear voltage, 0 to 10 VDC	
<b>4</b> Power supply	A: AC 80 to 260V D: DC 24 V	
<b>5</b> Output 2 options	R: Relay, 250 VAC, 5A V: Voltage pulse, 12V +10 to 20% C: DC current, 4 to 20 mA L: Linear voltage, 0 to 10 VDC	
<b>6</b> Optional function 1	0: None, 1: Event input 3, 2: RS-485 communication	
<b>7</b> Optional function 2	0: None, 1: Event input 2, 2: CT input 2, 3: Retransmission output	
<b>8</b> Optional function 3	0: None, 1: Event input 1, 2: CT input 1, 3: Remote setup input	

## DT3 Accessories Information

**D T 3 - 1**

Accessories	DT3 : Delta DT Series Temperature Controller	
<b>1</b> Option 1	20ESTD : DT320 EXTENSION without RS-485 & EV3	R : Relay Output
	20ECOM : DT320 EXTENSION include RS-485	V : DC Voltage Pulse Output
	20EEV3 : DT320 EXTENSION include EVENT3	C : DC Current Output
	30ESTD : DT330 EXTENSION without RS-485 & EV3	L : DC Linear Voltage Output
	30ECOM : DT330 EXTENSION include RS-485	EVENT : Event Input
	40ESTD : DT340/DT360 EXTENSION without RS-485 & EV3	CTI : CT Input
	40ECOM : DT340/360 EXTENSION include RS-485	RETRANS : Retransmission
	40EEV3 : DT340/360 EXTENSION include EVENT3	REMOTE : Remote set point
		CT30A : 30A CT
		CT100A : 100A CT

## Ordering Information

### DTA

**1 2 3 4 5 6 - 7**

**1 2**

Series Name	DTA : Delta A Series Temperature Controller	
<b>1 2 3 4</b> Panel size (W x H)	4848 : 1/16 DIN W48 x H48 mm 4896 : 1/8 DIN W48 x H96 mm 9696 : 1/4 DIN W96 x H96 mm	7272 : W72 x H72 mm 9648 : W96 x H48 mm
<b>5</b> Output	R : Relay, SPST (4848: SPST), 250VAC, 5A V : Voltage pulse, 14V +10% ~ -20% (Max. 40mA) C : Current, 4~20mA	
<b>6</b> Communication (optional)	0 : N/A	1 : RS-485 communication
<b>7</b> CT (optional)	□ : N/A	T : With CT (only DTAT272R0)

## DTB

**1 2 3 4 5 6 7**

\*DTB4824 has no optional function and no extra alarm output. Output 2 can be set to alarm output.

\*DTB4848 has only 1 optional alarm output. Output 2 can be set to the 2<sup>nd</sup> alarm output.

\*DTB9696 has optional valve control function. Model name: DTB9696RRV.

Series Name	DTB : Delta B Series Temperature Controller	
<b>1 2 3 4</b> Panel size (W x H)	4824 : 1/32 DIN W48 x H24 mm 4848 : 1/16 DIN W48 x H48 mm	4896 : 1/8 DIN W48 x H96 mm 9696 : 1/4 DIN W96 x H96 mm
<b>5</b> Output 1 options	R : Relay, SPDT (4824/4848: SPST), 250VAC, 5A V : Voltage pulse: 14V +10% ~ -20% C : DC current: 4 ~ 20mA L : Linear voltage: 0 ~ 5V, 0 ~ 10VDC	
<b>6</b> Output 2 options	R : Relay, SPDT (4824/4848: SPST), 250VAC, 5A V : Voltage pulse: 14V +10% ~ -20%	
<b>7</b> Optional function	<input type="checkbox"/> : Without CT, without EVENT input <input checked="" type="checkbox"/> : With CT, without EVENT input	E : Without CT, with EVENT input V : Valve contro

## DTC

**1 2 3 4 5**

Series Name	DTC : Delta C Series Temperature Controller	
<b>1</b> Controller type	1 : Main unit 2 : Extension unit	
<b>2</b> Number of auxiliary outputs	0 : Standard 2 outputs, no auxiliary output	
<b>3 4</b> Optional function	00 : Standard function 01 : With CT input	
<b>5</b> Output	R : Relay, SPST, 250VAC, 3A V : Voltage pulse, 12V +10% ~ -20% C : Current, 4 ~ 20mA L : Linear voltage, 0 ~ 10V	

## DTD

**1 2 3 4 5 0**

Series Name	DTD : Delta D Series Temperature Controller	
<b>1 2 3 4</b> Panel size (W x H)	4848 : 1/16 DIN W48 x H48 mm 4896 : 1/8 DIN W48 x H96 mm	7272 : W72 x H72 mm
<b>5</b> Output	R : Relay, SPST, 250VAC, 5A V : Voltage pulse, 14V +10% ~ -20% (Max. 40mA)	
0 Optional function	0 : N/A	

## DTE

**1 2 3**

Series Name	DTE : Delta E Series Temperature Controller	
<b>1</b> Controller type	1 : Main unit    2 : Accessory	
<b>2 3</b> Optional function	OT : 4-channel TC (main unit, accessory) OP : 4-channel PT (main unit, accessory) OV : 4 channels of voltage pulse output OC : 4 channels of linear current output	OR : 4 channels of relay output OL : 4 channels of linear voltage output OD : 4 digital inputs & 4 digital outputs CT : 4 channels of current transformers DS: Display & setup module

## DTV


**1 2 3 4 5**

Series Name	DTV : Delta V Series Temperature Controller	
<b>1 2 3 4</b> Panel size (W x H)	4896 : 1/8 DIN W48 x H96 mm 9696 : 1/4 DIN W96 x H96 mm	
<b>5</b> Output	R : Relay, SPDT, 250VAC, 5A	




## Dimensions


**4824**

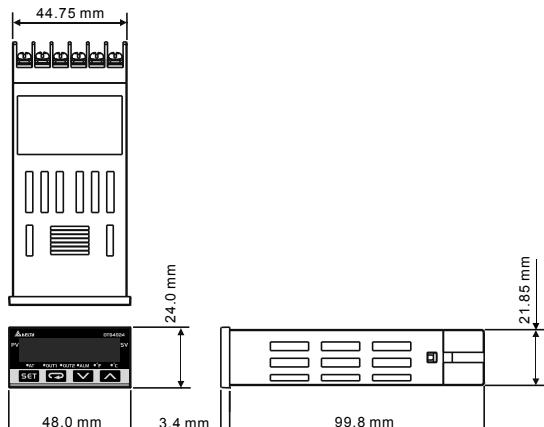


**7272**

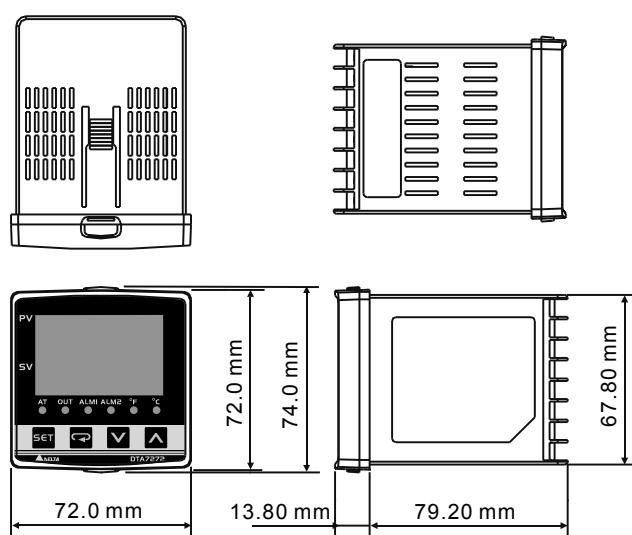

**4848**

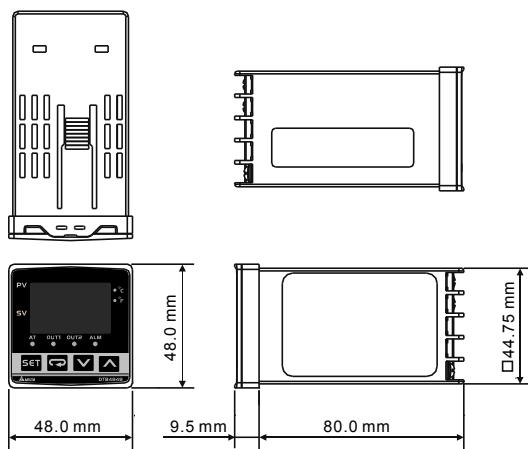


**9648**

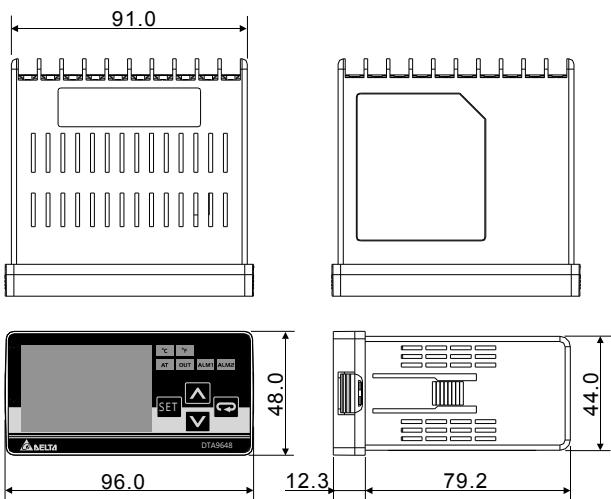





**4896**

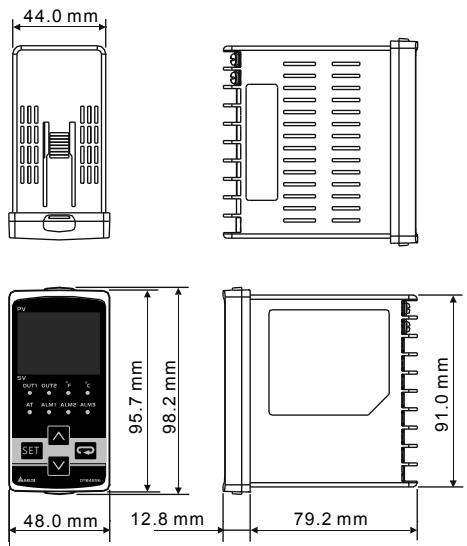


**9696**

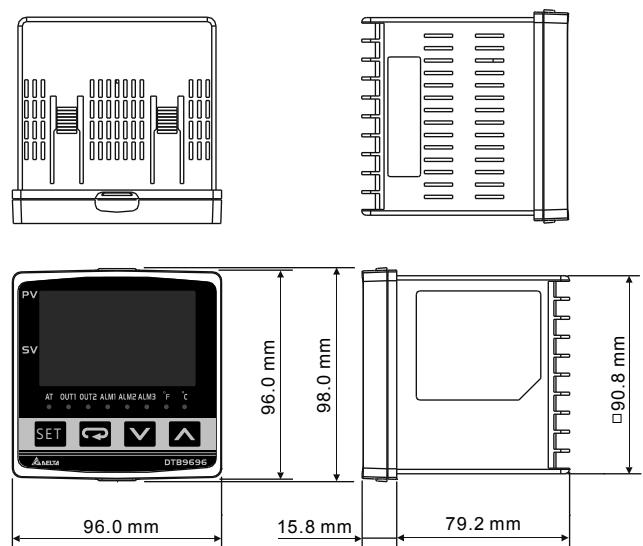

**DTC**

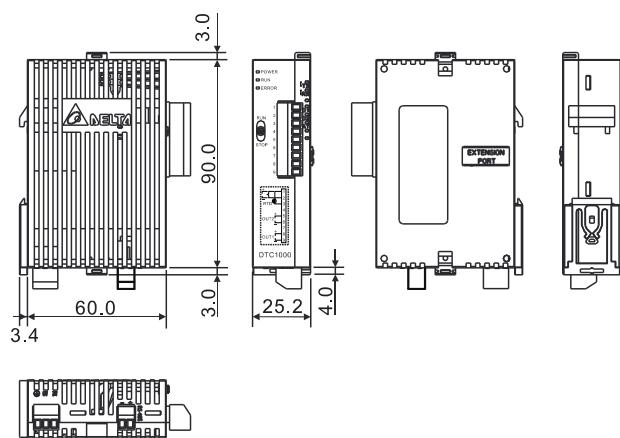

**DTE**

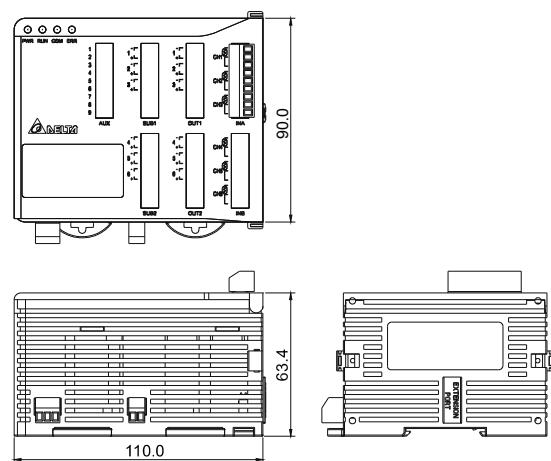



Smarter. Greener. Together.

### **Industrial Automation Headquarters**

#### **Delta Electronics, Inc.**

Taoyuan Technology Center  
No.18, Xinglong Rd., Taoyuan City,  
Taoyuan County 33068, Taiwan  
TEL: 886-3-362-6301 / FAX: 886-3-371-6301

### **Asia**

#### **Delta Electronics (Jiangsu) Ltd.**

Wujiang Plant 3  
1688 Jiangxing East Road,  
Wujiang Economic Development Zone  
Wujiang City, Jiang Su Province,  
People's Republic of China (Post code: 215200)  
TEL: 86-512-6340-3008 / FAX: 86-769-6340-7290

#### **Delta Greentech (China) Co., Ltd.**

238 Min-Xia Road, Pudong District,  
ShangHai, P.R.C.  
Post code : 201209  
TEL: 86-21-58635678 / FAX: 86-21-58630003

#### **Delta Electronics (Japan), Inc.**

Tokyo Office  
2-1-14 Minato-ku Shibadaimon,  
Tokyo 105-0012, Japan  
TEL: 81-3-5733-1111 / FAX: 81-3-5733-1211

#### **Delta Electronics (Korea), Inc.**

1511, Byucksan Digital Valley 6-cha, Gasan-dong,  
Geumcheon-gu, Seoul, Korea, 153-704  
TEL: 82-2-515-5303 / FAX: 82-2-515-5302

#### **Delta Electronics Int'l (S) Pte Ltd**

4 Kaki Bukit Ave 1, #05-05, Singapore 417939  
TEL: 65-6747-5155 / FAX: 65-6744-9228

#### **Delta Electronics (India) Pvt. Ltd.**

Plot No 43 Sector 35, HSIIDC  
Gurgaon, PIN 122001, Haryana, India  
TEL : 91-124-4874900 / FAX : 91-124-4874945

### **Americas**

#### **Delta Products Corporation (USA)**

Raleigh Office  
P.O. Box 12173,5101 Davis Drive,  
Research Triangle Park, NC 27709, U.S.A.  
TEL: 1-919-767-3800 / FAX: 1-919-767-8080

#### **Delta Greentech (Brasil) S.A**

Sao Paulo Office  
Rua Itapeva, 26 - 3º andar Edificio Itapeva One-Bela Vista  
01332-000-São Paulo-SP-Brazil  
TEL: +55 11 3568-3855 / FAX: +55 11 3568-3865

### **Europe**

#### **Deltronics (The Netherlands) B.V.**

Eindhoven Office  
De Witbogt 15, 5652 AG Eindhoven, The Netherlands  
TEL: 31-40-2592850 / FAX: 31-40-2592851

\*We reserve the right to change the information in this catalogue without prior notice.